




TRANSMISSIONS?BEARINGS EUROPE

INA RASE45 bearing units

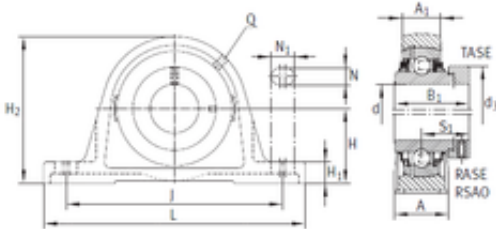

RASE45 Bearing 2D drawings and 3D CAD models

Bearing No. RASE45

Bore Diameter	45 mm
d	45 mm
S1	35,1 mm
Thread (Q)	Rp1/8
d3	63 mm
A	48 mm
A1	32 mm
B1	56,5 mm
H	54 mm
H1	21,5 mm
H2	107 mm
J	150 mm
L	192 mm
N	14 mm
N1	29 mm
Weight	2,28 Kg
Basic dynamic load rating (C)	32,5 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	2.4
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



TRANSMISSIONS?BEARINGS EUROPE

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE45KRRB
Seals	Double Land Riding Rubber Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Standard Shaft Height With Set Screw
Long Description	2 Bolt Pillow Block; 45MM Bore; 54MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 136.5MM Minimum Bolt Spacing; 160.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Rid
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	RASE45
Weight / LBS	5.292
Nominal Bolt Center to Center	5.8 Inch 146.5 Millimeter
Bolt Spacing Maximum	6.319 Inch 160.5Millimeter
Bolt Spacing Minimum	5.374 Inch 136.5Millimeter
Actual Bolt Center to Center	0 Inch 0Millimeter
Bore	1.772 Inch 45 Millimeter
Base to Center Height	2.126 Inch 54 Millimeter



TRANSMISSIONS?BEARINGS EUROPE

Length Thru Bore

2.217 Inch | 56.3 Millimeter